


M16 Series

Dual-axis Hall-effect thumb joystick

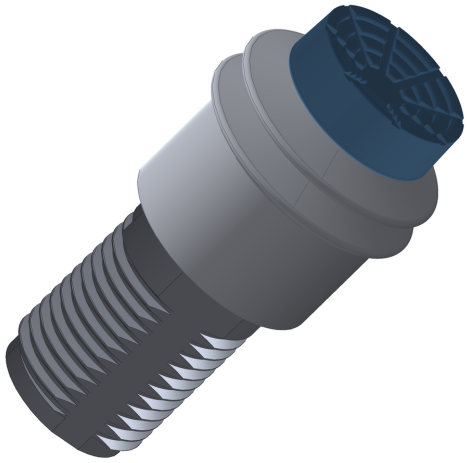

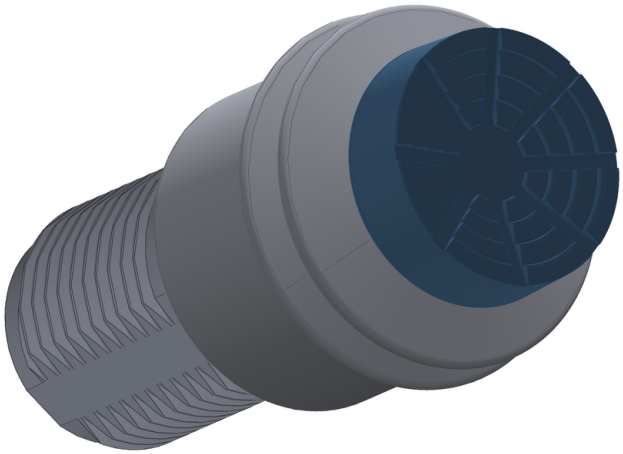



M16-RR
Spring-return


Key features

- Dual-channel output
- 3D Hall-effect sensing
- IP65–IP68 protection rating (customised on request)
- Output: analogue (0.5–4.5 V) / PWM (optional)
- Mechanical mode: spring-return
- M4 thread for top extension rod (optional)
- M16×1.5 mounting thread
- Push-down switch (optional), switch life 1,000,000 cycles

This document is for selection reference only. Final parameters, configurations and supply terms are subject to confirmation with Gudao and to the technical documents or contract agreed by both parties.


Chengdu Gudao Technology Co., Ltd.
No. 24, Section 1, South 1st Ring Road, Wuhou District, Chengdu, Sichuan, China
Tel / WeChat: +86 139 8004 0082 · Email: 13980040082@139.com · www.gudao-tech.com

Mounting dimensions

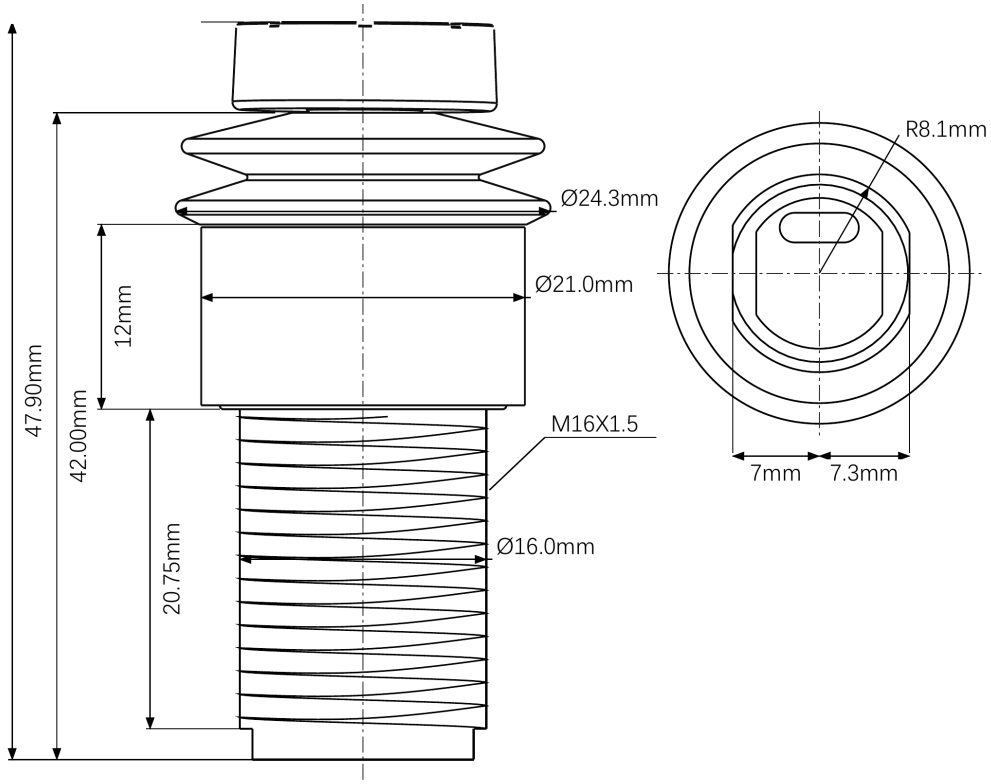

M16-RR · Spring-return

Recommended panel cut-out

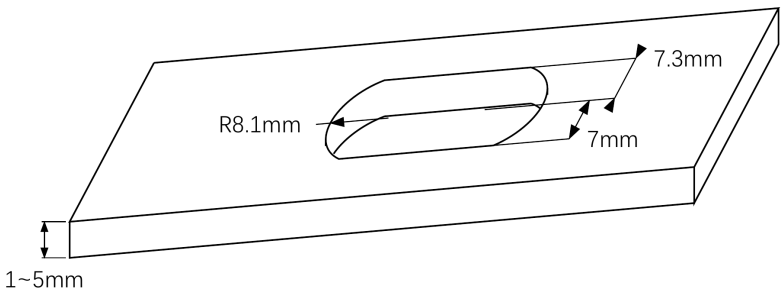


This document is for selection reference only. Final parameters, configurations and supply terms are subject to confirmation with Gudao and to the technical documents or contract agreed by both parties.

Chengdu Gudao Technology Co., Ltd.
No. 24, Section 1, South 1st Ring Road, Wuhou District, Chengdu, Sichuan, China
Tel / WeChat: +86 139 8004 0082 · Email: 13980040082@139.com · www.gudao-tech.com

Electrical parameters

Supply voltage	5 V
Output mode	Dual-channel analogue / dual-channel PWM
Output voltage range	0.5–4.5 V (customisable)
PWM duty cycle range	5%–95% (customisable)
PWM frequency	1000 Hz
Output current	8 mA (analogue output); 20 mA (PWM output)
Sensing method	Hall-effect

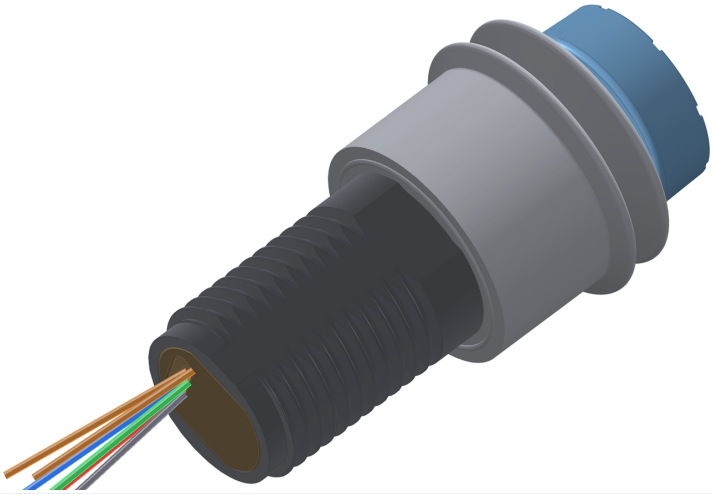


Wiring

Wire colour	Function
Red	Supply +5 V
Black	GND
Blue	OUT1
Green	OUT2
Brown	Switch in
Brown	Switch out

This document is for selection reference only. Final parameters, configurations and supply terms are subject to confirmation with Gudao and to the technical documents or contract agreed by both parties.

Chengdu Gudao Technology Co., Ltd.
No. 24, Section 1, South 1st Ring Road, Wuhou District, Chengdu, Sichuan, China
Tel / WeChat: +86 139 8004 0082 · Email: 13980040082@139.com · www.gudao-tech.com

M16-RR · Spring-return



Operating characteristic: always returns to the centre position.

Maximum angle (each direction)	±22.5°
Operating force	3 N ± 0.5 N
Service life	> 1,000,000 cycles
Centring accuracy	0.3°

Environmental parameters

Protection rating	IP65–IP68 (customised on request)
Operating temperature	−40 °C to +85 °C
Storage temperature	−40 °C to +85 °C
EMC	Testing to the applicable standard (e.g. EN ISO 14982, ISO 13766-1) can be arranged per project.

M16 series ordering code

M16 – **RR** – **N** – **45**

Series	Operating type	Push switch	Output type
M16	RR = spring-return	N = without push switch Y = with push switch	50 = 0–5 V 45 = 0.5–4.5 V 40 = 1–4 V PWM = PWM output

Example: M16-RR-Y-45 = M16 series, spring-return, with push switch, 0.5–4.5 V analogue output.

This document is for selection reference only. Final parameters, configurations and supply terms are subject to confirmation with Gudao and to the technical documents or contract agreed by both parties.

Chengdu Gudao Technology Co., Ltd.
No. 24, Section 1, South 1st Ring Road, Wuhou District, Chengdu, Sichuan, China
Tel / WeChat: +86 139 8004 0082 · Email: 13980040082@139.com · www.gudao-tech.com